

# DH-XVR4216/32AN-X

16/32 Channel Penta-brid 720P Digital Video Recorder



- H.265 video compression
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 18/16 channels IP camera inputs, each channel up to 6MP; Max 72/64Mbps Incoming Bandwidth
- Long transmission distance over coax cable
- Supports 2 SATA HDD, up to 10TB

## System Overview

With the surveillance operators pursuing to HD/UHD which further adds the storage and transmission cost, HDCVI H.265+/H.265 has been released to incredibly decrease the required bitrate while ensuring the video quality in realizing high resolution surveillance such as 4MP/4K.

The Lite Series is designed for high cost performance and quality. The range offers a great solution for users facing budget constraints who both require quality and performance. And with the adoption of Smart H.265+/H.265, the series improves encoding efficiency, saving on bandwidth/storage costs, and significantly reducing the Total Cost of Ownership (TCO).

## Functions

### H.265 Video Compression

Newly added H.265 video compression ensures the same image quality with only half bitrate and storage compared to H.264.

### HDCVI/AHD/TVI/CVBS/IP Auto-detect


The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

### 6MP Resolution

The XVR supports up to 6MP HD resolution (2880 x 1920) IPC input for recording, live viewing.

### Coaxial Audio/Upgrade/Alarm

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

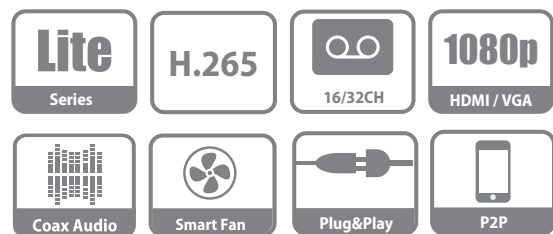

## Long Distance Transmission

The HDCVI system supports long distance transmission over coaxial cable and UTP, max. 700m for 4K/4MP, 800m for 1080P and 1200m for 720P.

## Smart Fan Design

The smart fan can automatically turn on or turn off according to the CPU temperature. This function can effectively reduce the fan noise to provide a better user experience.

## Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

## Perfect Image Quality

High performance chip provides perfect image quality with better color reproduction.

## P2P

Monitor at anytime and anywhere. Easily and conveniently manage the device.

## Technical Specification

### System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

### Video and Audio

Analog Camera Input	16/32 Channel, BNC
HDCVI Camera	1080P@25/30fps, 720P@25/30fps
AHD Camera	1080P@25/30, 720P@25/30fps
TVI Camera	1080P@25/30, 720P@25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	16+2/16 Channel, each channel up to 6MP
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA

### Recording

Compression	H.265/H.264
Resolution	1080N, 720P, 960H, D1, CIF
Record Rate	Main Stream: the 1st channel 1080N/720P(1~25/30fps), others 1080N/720P(1~15fps); 960H/D1/CIF (1~25/30fps) Sub stream:CIF(1~7fps)
Bit Rate	32Kbps ~ 4096Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post- record: 10 ~ 300 sec
Audio Compression	AAC(only for the 1st channel), G.711A, G.711U, PCM
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel

### Display

Interface	16CH:1 HDMI, 1 VGA, 32CH:1 HDMI, 1 VGA, 1 TV
Resolution	1920x1080, 1280x1024, 1280x720
Multi-screen Display	16CH: When IP extension mode not enabled:1/4/8/9/16 When IP extension mode enabled:1/4/8/9/16/25 32CH:1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

### Network

Interface	16CH:1 RJ-45 Port (100M) 32CH:1 RJ-45 Port (1000M)
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 16.12, CGI Conformant

### Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering and Diagnosis
Alarm input	N/A
Relay Output	N/A

### Playback and Backup

Playback	1/4/9/16
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

### Storage

Internal HDD	2 SATA Port, up to 10TB capacity
eSATA	N/A

### Auxiliary Interface

USB	16CH:2 USB 2.0 32CH:1 USB 2.0 , 1 USB 3.0
RS232	N/A
RS485	1 Port, for PTZ Control

### Electrical

Power Supply	16CH: DC12V/4A 32CH: DC12V/5A
Power Consumption (without HDD)	16CH:<10W 32CH: <20W

### Construction

Dimensions	1U, 375mmx287mmx53mm (14.8" x 11.3" x 2.1")
Net Weight (without HDD)	16CH: 1.6kg (3.6 lb) 32CH: 1.9kg (4.2 lb)
Gross Weight	16CH: 3.0kg (6.6 lb) 32CH: 3.2kg (7.0 lb)
Installation	Desktop installation

### Environmental

Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 10%~90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0~90% RH

### Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
---------------------	---


### Certifications

Certifications	FCC: Part 15 Subpart B
	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024
	UL: UL 60950-1

**Ordering Information**


Type	Part Number	Description
16 Channel XVR	DH-XVR4216AN-X	16 Channel Penta-brid 720P 1U Digital Video Recorder
32 Channel XVR	DH-XVR4232AN-X	32 Channel Penta-brid 720P 1U Digital Video Recorder

**Dimensions (mm)**

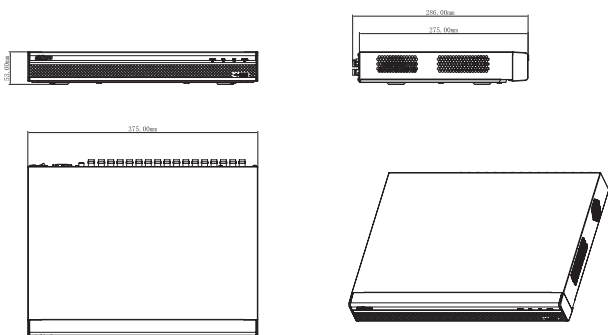


**Rear Panel**

DH-XVR4216AN-X

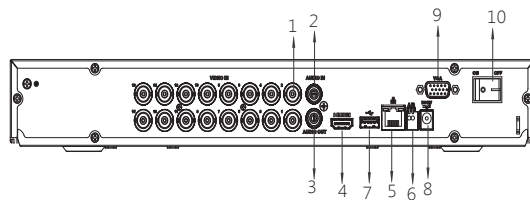

- |                            |                      |
|----------------------------|----------------------|
| 1 VIDEO IN                 | 6 RS485 Interface    |
| 2 AUDIO IN, RCA Connector  | 7 USB Interface      |
| 3 AUDIO OUT, RCA Connector | 8 DC 12V Power Input |
| 4 HDMI Interface           | 9 VGA Interface      |
| 5 Network Interface        | 10 Power Switch      |

DH-XVR4232AN-X

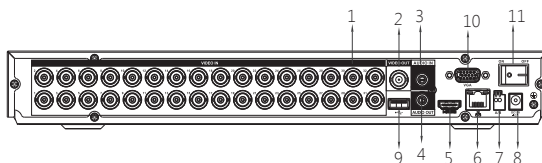

- |                            |                      |
|----------------------------|----------------------|
| 1 VIDEO IN                 | 7 RS485 Interface    |
| 2 VIDEO OUT                | 8 DC 12V Power Input |
| 3 AUDIO IN, RCA Connector  | 9 USB Interface      |
| 4 AUDIO OUT, RCA Connector | 10 VGA Interface     |
| 5 HDMI Interface           | 11 Power Switch      |
| 6 Network Interface        |                      |

**Installation on Rack Mount Tray**

